

NOMINAL 2x4 CLEANROOM LED LIGHT FIXTURE.
 DESIGNED TO FIT 1-1/2" GRID AND 2" STRUCTURAL GRID ON 24-1/2" AND 48-1/2" CENTERS.
 SEALED 20ga STEEL CONSTRUCTED HOUSING, WHITE POWDER COATED FINISH.
 POLYSTYRENE TEXTURED REVERSIBLE DIFFUSER LENS, IN 20ga STEEL FRAME, WHITE POWDER COATED FINISH.
 ACCESS BOX MOUNTED ON TOP BEVEL FOR ELECTRICAL CONNECTIONS.
 SUITABLE FOR DAMP LOCATIONS.
 PRE-MOUNTED DRIVER.
 FULL RANGE DIMMING FROM 0-10VDC.
 LED LIFE PROJECTED HOURS: 60K


VOLTAGE/CURRENT REQUIREMENTS:
 120V = .4 AMPS
 240/277V = .2 AMPS

SYSTEM POWER LEVEL: 51 WATTS (AVERAGE @ STANDARD VOLTAGES)
 SYSTEM EFFICACY: 104 Lm/W
 CORRELATED COLOR TEMP: 5100 K
 DELIVERED LUMENS: 5225
 COLOR RENDERING INDEX: 82.9


OPTIONS:
 EMERGENCY LIGHTING UNIT (DELIVERS 1000-880 Lm OVER 90 MINUTES).
 8' POWER CORD WITH NEMA 5-15 PLUG.

SEE SCHEDULE FOR SPECIFIC MODEL.

Item	Pt#	Description
A	148522	120-277v, 50/60Hz, 2x4 LED TROFFER, STANDARD SPECIFICATIONS
B	--	120-277v, 50/60Hz, 2x4 LED TROFFER, EMERGENCY UNIT, STANDARD SPECIFICATIONS
C	--	120-277v, 50/60Hz, 2x4 LED TROFFER, POWER CORD & PLUG, STANDARD SPECIFICATIONS

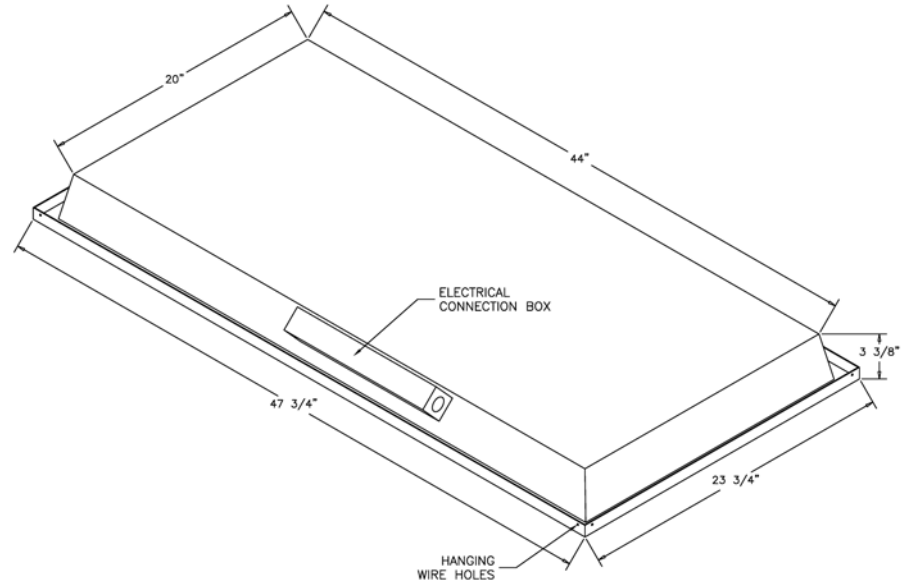

DRAWING FOR REFERENCE

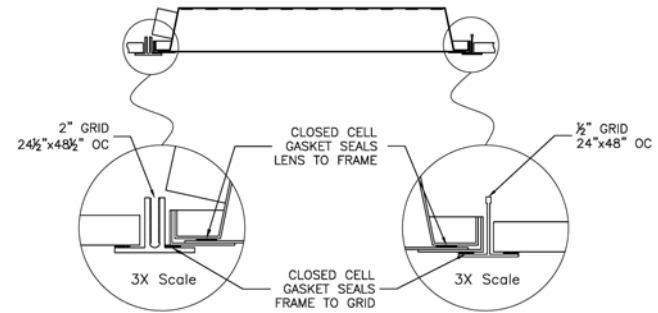

NOTE: Optional power cords that may be provided with this unit may not meet local building codes if this is to be installed in what can be classified or interpreted as a "Plenum" environment. We recommend you contact your local electrical inspector to clarify this prior to installation.

Dimension	1/2"	2"	3"	4"	6"	8"
Position	1/2"	2"	3"	4"	6"	8"
Size	1/2"	2"	3"	4"	6"	8"
Material	1/2"	2"	3"	4"	6"	8"
Notes	1/2"	2"	3"	4"	6"	8"

Rev	Date	Description
A	11-19-2015	FROM 0242-35, INITIAL DRAWING
B	02-19-2018	UPDATE DRAWING NUMBER

Part No.:	SEE SCHEDULE	Drawn by:	C. Prine
Rev:	--	Date:	11-19-2015
Checked by:	--	Checked by:	--

Description:	2x4 CLEAN ROOM LED LIGHT FIXTURE
--------------	----------------------------------

Drawing No. 0242-36B
 Scale: B, NTS