



Floor Supported Softwall Cleanrooms

Classifications Offered

- ISO Class 6, 7, 8
- Federal Standard 209 Class 1,000; 10,000; 100,000

Frame: Prefabricated white painted steel frame leg.

Leg: Bottom base plate with four (4) mounting holes.

Ceiling System: Painted support structure and aluminum T-Grid.

Curtain Panels: All sides are enclosed with clear vinyl 40 mil curtain panels. Length is pre-engineered for proper air flow relief, appropriate for size and classification.

Entry Door: Via a 4' strip door consisting of 8" 80 mil clear vinyl strips overlapped 2". Individual strips are factory installed on an aluminum mounting track. The strip door is attached to the cleanroom frame on-site during assembly.


Interior Height: Eight (8) Feet.

Lighting: 4-lamp cleanroom light fixtures with energy efficient T8 electronic ballasts. Fluorescent lamp tubes are not included.


Ceiling Panels: Sealed edges and white vinyl laminate on one side for spaces not occupied by Fan Filter Units or Light Fixtures.

Electrical: Electrical Connections to the building power source are to be completed on site by a qualified electrician at buyer's cost.

HEPA Fan Filter Units: 2' x 4' *CleanFast* Fan Units Sit on Top to Clean and Pressurize Airflow into Cleanroom.

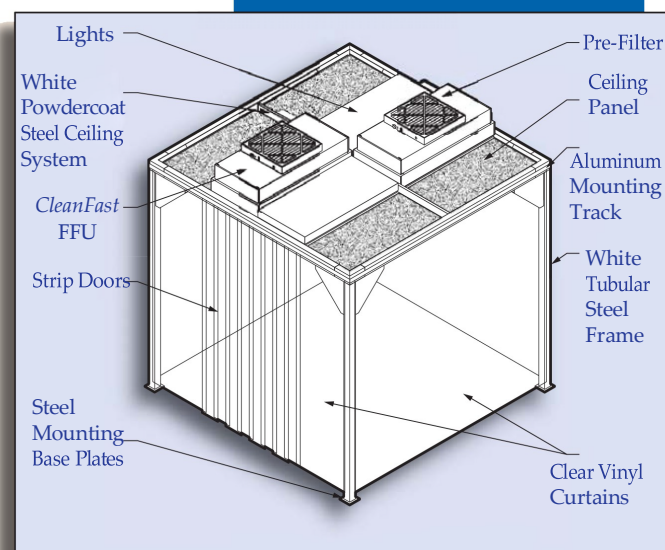

Typical
Softwall Cleanroom

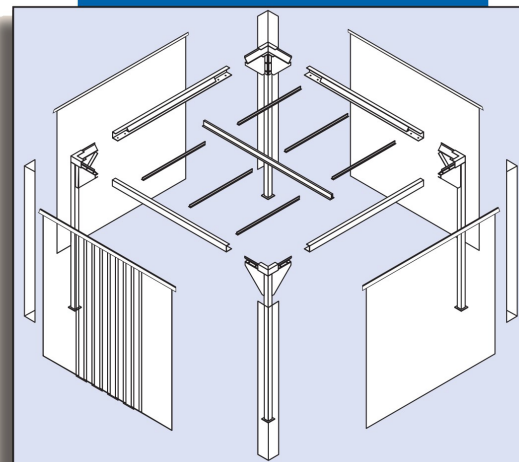

Softwall Cleanroom
(Exploded View)



CORPORATE OFFICES: 888 Dayton Street Suite 105, Yellow Springs, OH 45387

TOLL FREE: (888) 423-6638

FAX: (937) 324-8753

E-MAIL: sales@bennettbennett.com